RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

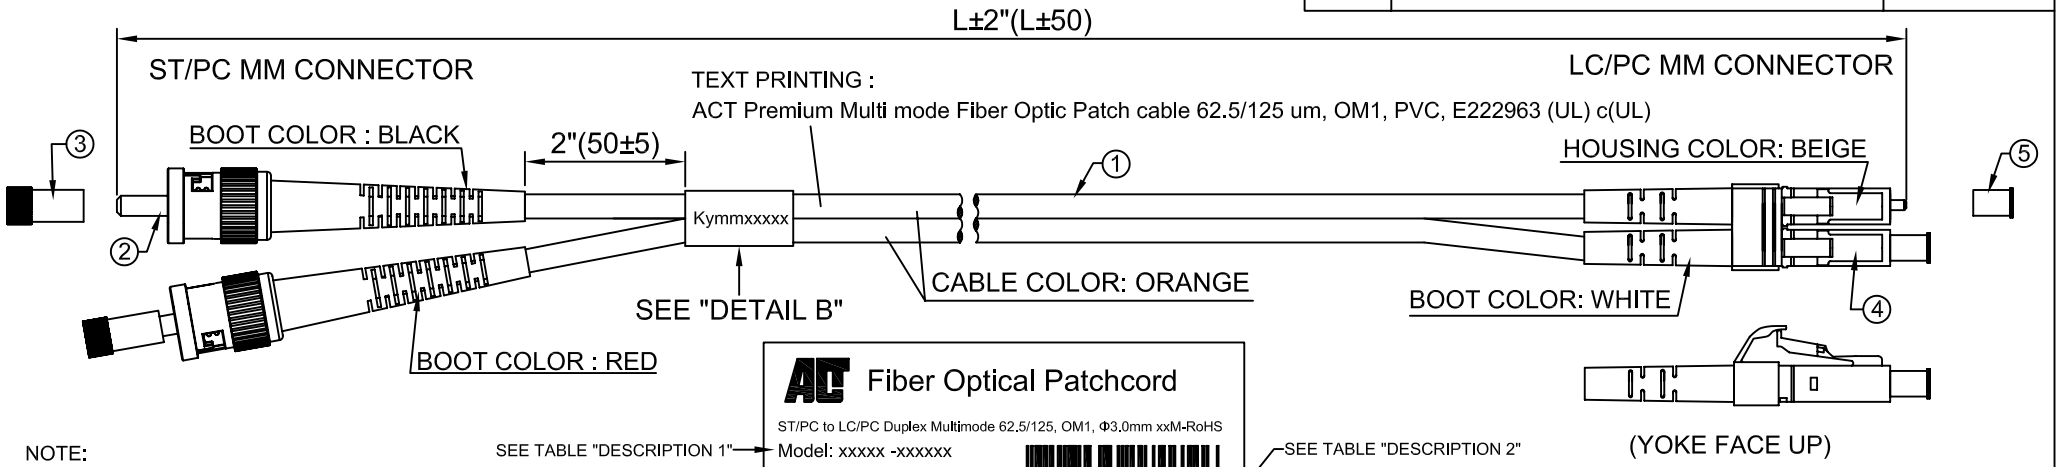

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE STRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

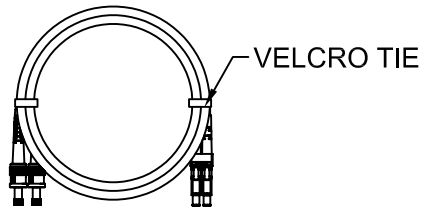

DETAIL A

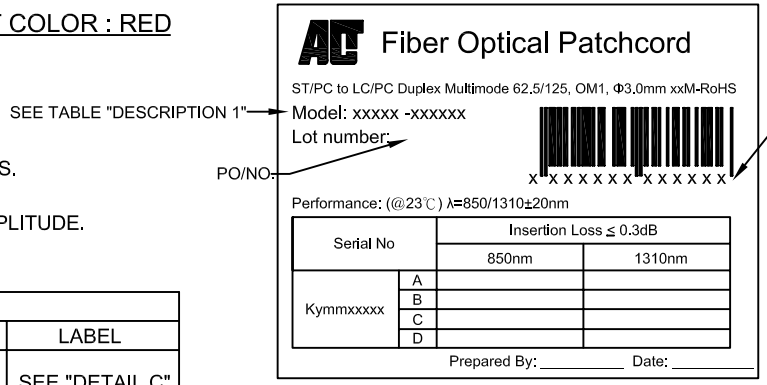

DETAIL C



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

RL7020	20	20	65.6'(20000)	912220-RL7020	8716065224276
RL7015	15	15	49.2'(15000)	912215-RL7015	8716065224269
RL7010	10	10	32.8'(10000)	912210-RL7010	8716065224252
RL7005	05	5	16.4'(5000)	912205-RL7005	8716065171020
RL7003	03	3	9.84'(3000)	912203-RL7003	8716065171013
RL7002	02	2	6.56'(2000)	912202-RL7002	8716065171006
RL7051	51	1.5	4.92'(1500)	9122015-RL7051	8716065224245
RL7001	01	1	3.28'(1000)	912201-RL7001	8716065170993
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSTOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
5	2PCS		LC DUST COVER, WHITE.
4	2SETS		CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS		ST DUST COVER, CLEAR.
2	2SETS		CONNECTOR: ST/PC MM, WITH BLACK & RED BOOT.
1	1PC		CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.

PART LIST

UNIT: Inches[mm]		TITLE: PATCHCORD ST-LC MULTIMODE DUPLEX 62.5/125, OM1, 3.0mm, ORANGE.	
DRAWN BY: Catherine	DATE: 2007/10/4	CUSTOMER	CUSTOMER PART NO.: RL70**
CHECKED BY	DATE	DRAWING NO.: PK709017	Ref. NO. / REV.: A
APPROVED BY	DATE		
SALE BY	DATE	TRENDEX PART NO.	